



Key:  
 — by others  
 — by EOS

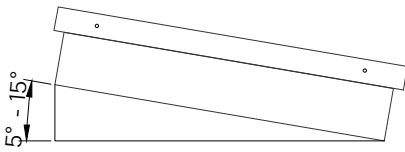

Rooflight must be installed on a roof pitch between 5-15° (by others). Failure to do so will result in water pooling on the rooflight.

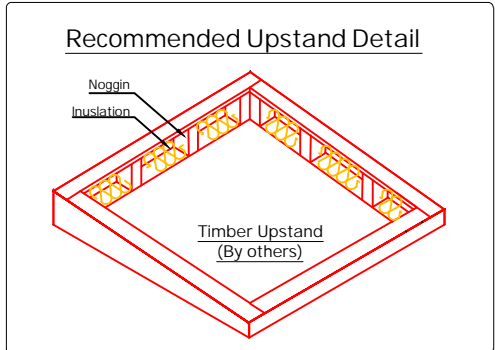

Title:  
**Flex Double Glazed Fixed Rooflight - Lid Only (For Builders Upstand)**

System: Flex	Size: 1000mm x 1000mm	Type: Fixed	Ref: F01
-----------------	--------------------------	----------------	-------------



Scale: 1:4 @ A3	Date: Jan 21	Revision: 0
--------------------	-----------------	----------------

EOS Rooflights, The Beechwood Centre, 42-46 Lower Gravel Road, Bromley, Kent, BR2 8GP [info@eosrooflights.co.uk](mailto:info@eosrooflights.co.uk) [www.eosrooflights.co.uk](http://www.eosrooflights.co.uk)

This drawing is copyright and may not be reproduced either in part or full without written permission from EOS Rooflight's. **DO NOT SCALE OFF THIS DRAWING**