Glass Specification Dependant on Rooflight Size.
Please Contact EOS or See on Specific rooflight Drawing.
Laminated Glass Always Included.

SECTION A-A

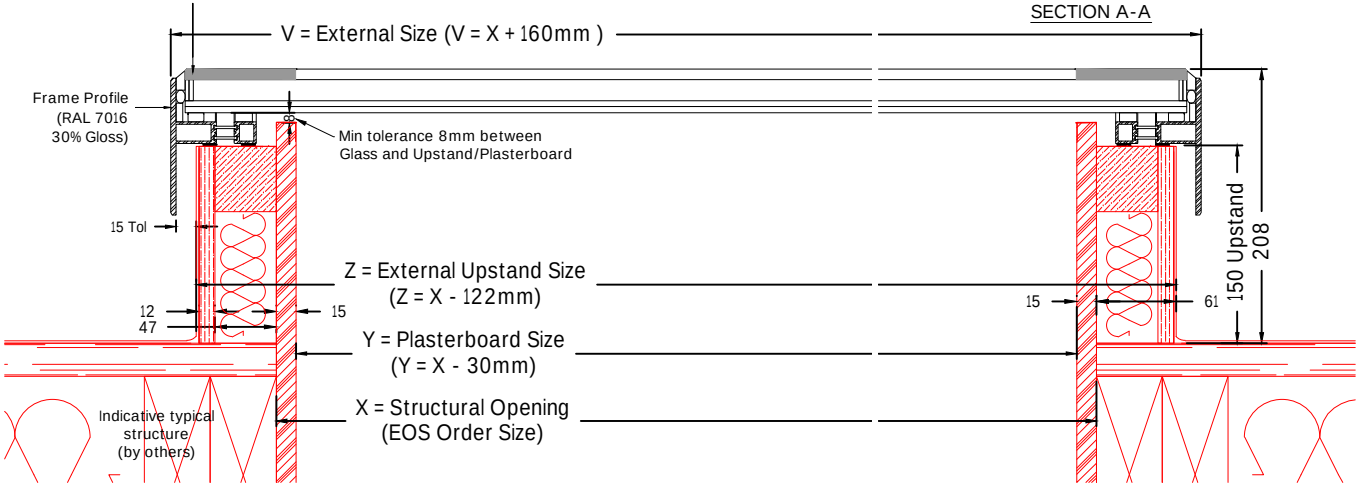

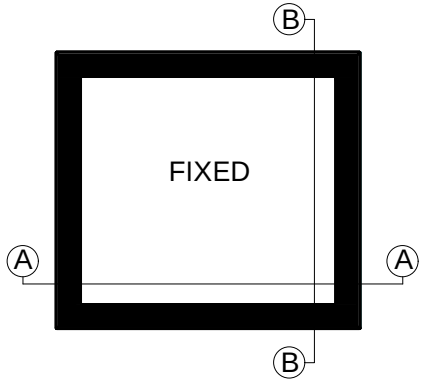

SECTION B-B

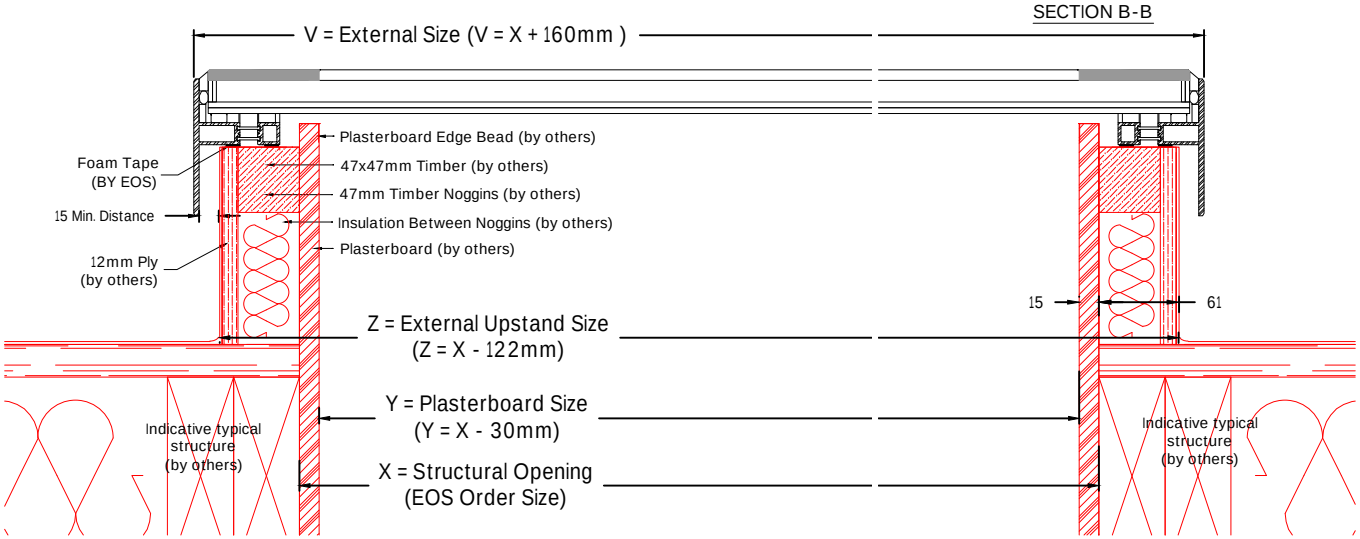

Key:
- by others
- by EOS

Recommended Upstand Detail

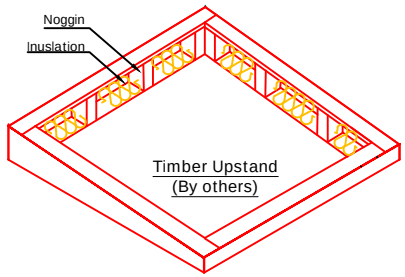

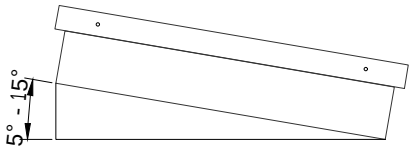

Rooflight must be installed on a roof pitch between 5-15° (by others). Failure to do so will result in water pooling on the rooflight.

Title:

Flex Double Glazed Fixed Rooflight - Lid Only (For Builders Upstand)

System:	Size:	Type:	Ref:
Flex	Bespoke	Fixed	

Scale:	Date:	
1:4 @ A3	Jan 21	0 revision

EOS Rooflights, The Beechwood Centre, 42-46 Lower Gravel Road, Bromley, Kent, BR2 8GP e:info@eosrooflights.co.uk w:www.eosrooflights.co.uk

This drawing is copyright and may not be reproduced either in part or full without written permission from EOS Rooflight's. DO NOT SCALE OFF THIS DRAWING