



Key:
 — by others
 — by EOS

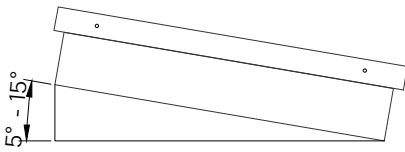

Rooflight must be installed on a roof pitch between 5-15° (by others). Failure to do so will result in water pooling on the rooflight.

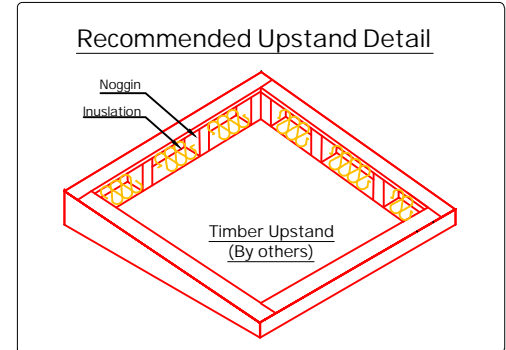

Title:
Flex Double Glazed Fixed Rooflight - Lid Only (For Builders Upstand)

System: Flex	Size: 1500mm x 1000mm	Type: Fixed	Ref: R17a
------------------------	---------------------------------	-----------------------	---------------------



Scale: 1:4 @ A3	Date: Jan 21	0 revision
---------------------------	------------------------	----------------------