



Key:  
 — by others  
 — by EOS

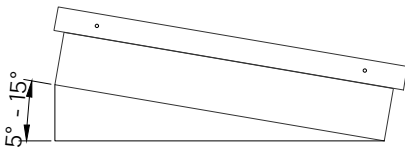

Rooflight must be installed on a roof pitch between 5-15° (by others). Failure to do so will result in water pooling on the rooflight.

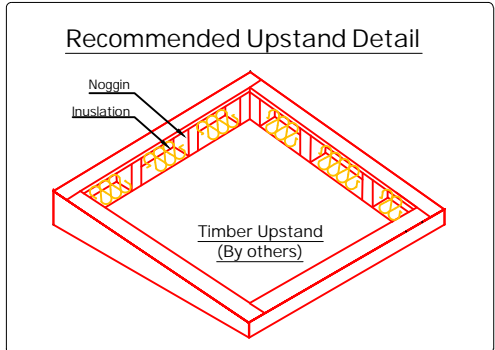

Title:  
**Flex Double Glazed Fixed Rooflight - Lid Only (For Builders Upstand)**

System: <b>Flex</b>	Size: <b>2400mm x 600mm</b>	Type: <b>Fixed</b>	Ref: <b>R6m</b>
------------------------	--------------------------------	-----------------------	--------------------



Scale: <b>1:4 @ A3</b>	Date: <b>Jan 21</b>	<b>0</b> revision
---------------------------	------------------------	----------------------