


**Key:**  
— by others  
 — by EOS

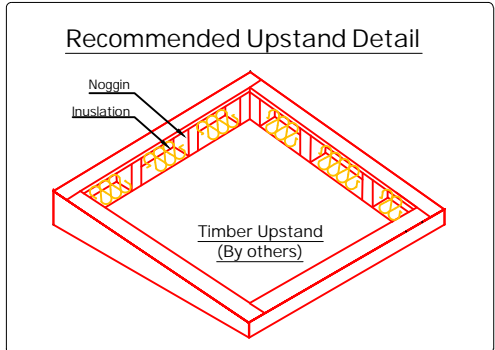

5° - 15°

Rooflight must be installed on a roof pitch between 5-15° (by others). Failure to do so will result in water pooling on the rooflight.

Title:  
**Flex Double Glazed Fixed Rooflight - Lid Only (For Builders Upstand)**

System: <b>Flex</b>	Size: <b>1200mm x 1200mm</b>	Type: <b>Fixed</b>	Ref: <b>S11</b>
------------------------	---------------------------------	-----------------------	--------------------



Scale: <b>1:4 @ A3</b>	Date: <b>Jan 21</b>	<b>0</b> revision
---------------------------	------------------------	----------------------