

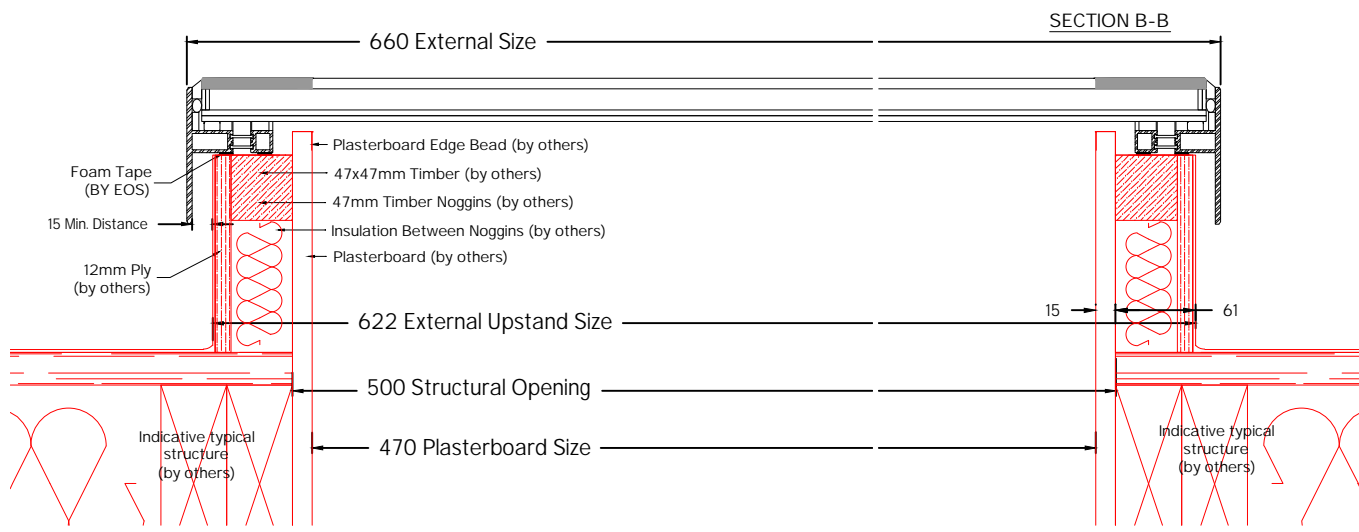



FIXED
 500x500mm

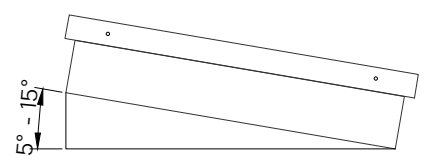

Recommended Upstand Detail

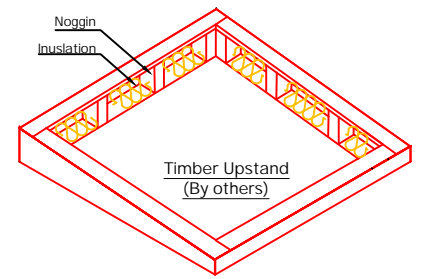

Rooflight must be installed on a roof pitch between 5-15° (by others). Failure to do so will result in water pooling on the rooflight.



Title:
 Flex Double Glazed Fixed Rooflight - Lid Only (For Builders Upstand)

Key:
 — by others
 — by EOS

System: Flex	Size: 500mm x 500mm	Type: Fixed	Ref: S2
-----------------	------------------------	----------------	------------



Scale: 1:4 @ A3	Date: Jan 21	0 revision
--------------------	-----------------	---------------