


Key:

— by others

— by EOS

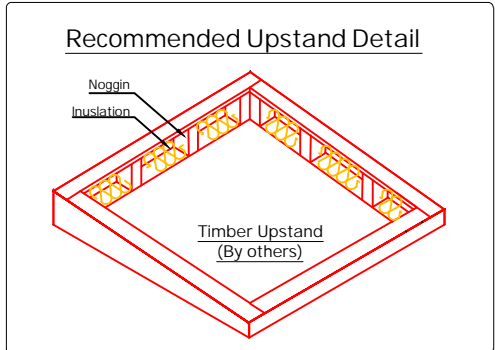

5° - 15°

Rooflight must be installed on a roof pitch between 5-15° (by others). Failure to do so will result in water pooling on the rooflight.

Title:
 Flex Double Glazed Fixed Rooflight - Lid Only (For Builders Upstand)

System: Flex	Size: 700mm x 700mm	Type: Fixed	Ref: S5
-----------------	------------------------	----------------	------------



Scale:
1:4 @ A3

Date:
Jan 21

0
revision