



Key:

	by others
	by EOS

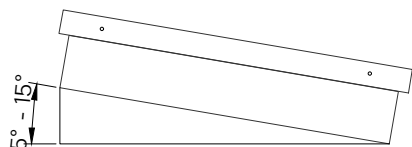

Rooflight must be installed on a roof pitch between 5-15° (by others). Failure to do so will result in water pooling on the rooflight.

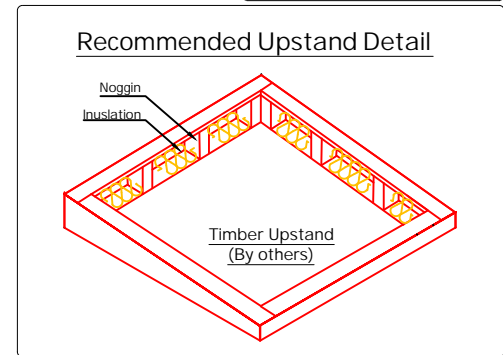

Title:
Flex Double Glazed Fixed Rooflight - Lid Only (For Builders Upstand)

System: Flex	Size: 1000mm x 1000mm	Type: Fixed	Ref: S9
-----------------	--------------------------	----------------	------------



Scale: 1:4 @ A3	Date: Jan 21	0 revision
--------------------	-----------------	---------------