


Key:  
 — by others  
 — by EOS

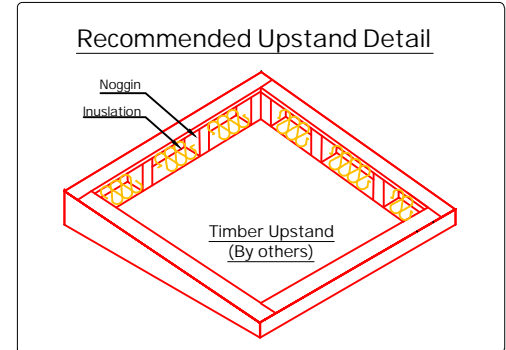

5° - 15°

Rooflight must be installed on a roof pitch between 5-15° (by others). Failure to do so will result in water pooling on the rooflight.

Title:  
**Flex Double Glazed Fixed Rooflight - Lid Only (For Builders Upstand)**

System: Flex	Size: 1200mm x 900mm	Type: Fixed	Ref: R16
-----------------	-------------------------	----------------	-------------



Scale: 1:4 @ A3	Date: Jan 21	0 revision
--------------------	-----------------	---------------