








## Installation Procedure

(See specific installation sheet for more details)

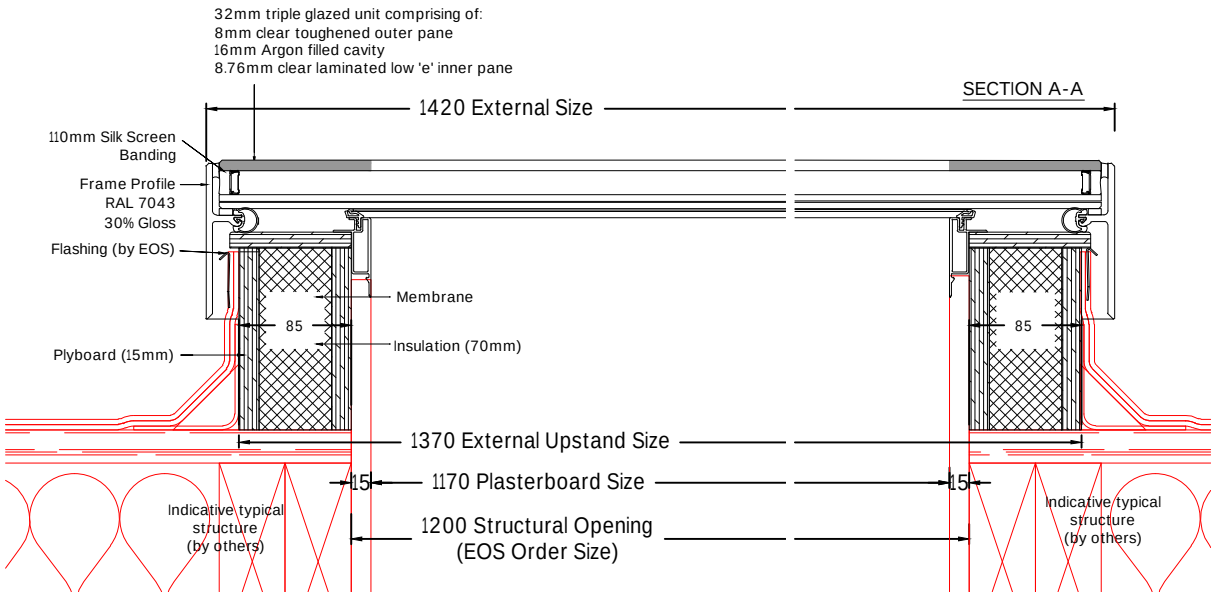


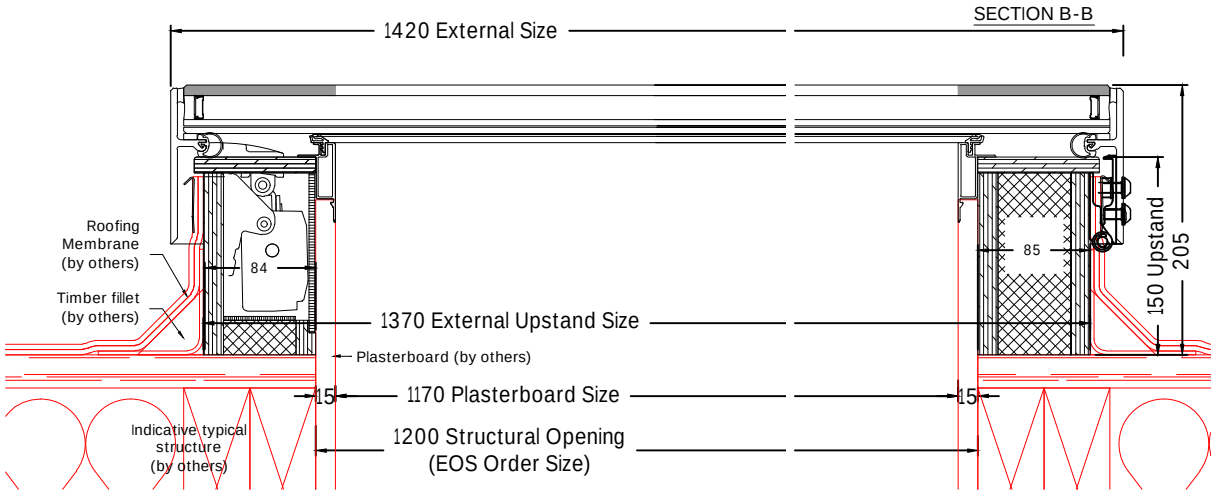


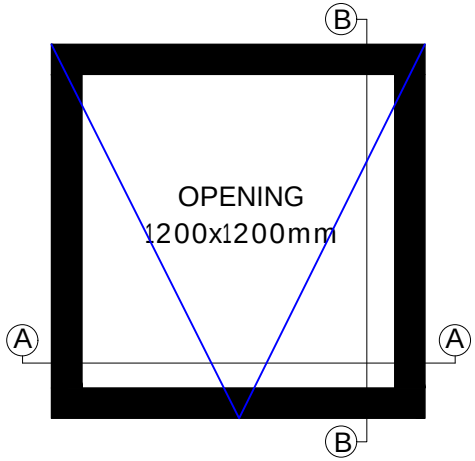


Rooflight must be installed on a roof pitch between 3-15° (by others). Failure to do so will result in water pooling on the rooflight.

Title:

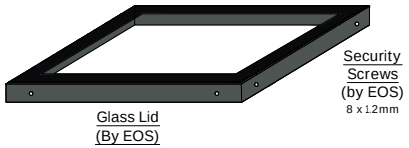Eco Double Glazed Opening Rooflight With Insulated Upstand

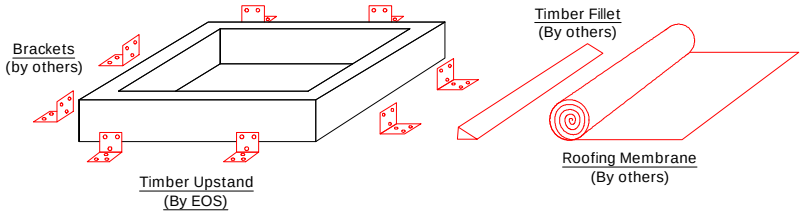Key:
by others
by EOS
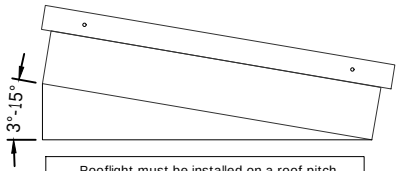
| System: | Size: | Type: | Ref: | Scale: | Date: | |
|---|---|---|---|---|---|---|
| Eco | 1200mm x 1200mm | OPENING | 4572 | 1:4 @ A3 | Jun 22 | 0 revision |

EOS Rooflights, The Beechwood Centre, 42-46 Lower Gravel Road, Bromley, Kent, BR2 8GP e:info@eosrooflights.co.uk w:www.eosrooflights.co.uk

This drawing is copyright and may not be reproduced either in part or full without written permission from EOS Rooflight's. DO NOT SCALE OFF THIS DRAWING